

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

| | | |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Applicant's or agent's file reference PHFR000067W0 | FOR FURTHER ACTION <small>see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.</small> | |
| International application No. PCT/EP 01/ 07188 | International filing date (day/month/year) 25/06/2001 | (Earliest) Priority Date (day/month/year) 27/06/2000 |
| Applicant KONINKLIJKE PHILIPS ELECTRONICS N.V. | | |

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.
- ☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).
- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

- ☒ the text is approved as submitted by the applicant.
- ☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

- ☒ the text is approved as submitted by the applicant.
- ☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

- ☒ as suggested by the applicant.
- ☐ because the applicant failed to suggest a figure.
- ☐ because this figure better characterizes the invention.
- 5 ☐ None of the figures.

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International Application No

EP 01/07188

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L27/233

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|----------------------------------------------------------------------------------------------------------------------|-----------------------|
| X | EP 0 648 037 A (THOMSON CSF) 12 April 1995 (1995-04-12) page 2, line 52 -page 3, line 8 --- | 1-10 |
| X | EP 0 349 064 A (TRT; PHILIPS) 3 January 1990 (1990-01-03) page 7, line 38 -page 8, line 17 claim 3 --- | 1,4-6,10 |
| A | --- | 2,3,7-9 |
| X | EP 0 940 958 A (SONY INT EUROP GMBH) 8 September 1999 (1999-09-08) page 7, line 30 - line 35 claim 1 --- | 1,4-6,10 |
| A | --- | 2,3,7-9 |
| | --- -/-- | |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

12 October 2001

Date of mailing of the international search report

22/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Orozco Roura, C

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International Application No

EP 01/07188

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--------------------------------------------------------------------------------------|-----------------------|
| A | US 4 328 587 A (MIZUNO TOSHIO ET AL) 4 May 1982 (1982-05-04) abstract ----- | 1-10 |

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/EP 01/07188

| Patent document cited in search report | | Publication date | | Patent family member(s) | Publication date |
|-------------------------------------------|---|---------------------|----|----------------------------|---------------------|
| EP 0648037 | A | 12-04-1995 | FR | 2711028 A1 | 14-04-1995 |
| | | | DE | 69428174 D1 | 11-10-2001 |
| | | | EP | 0648037 A1 | 12-04-1995 |
| EP 0349064 | A | 03-01-1990 | FR | 2633471 A1 | 29-12-1989 |
| | | | CA | 1308450 A1 | 06-10-1992 |
| | | | DE | 68916115 D1 | 21-07-1994 |
| | | | DE | 68916115 T2 | 02-02-1995 |
| | | | EP | 0349064 A1 | 03-01-1990 |
| | | | JP | 2046044 A | 15-02-1990 |
| | | | JP | 3031922 B2 | 10-04-2000 |
| | | | US | 5151925 A | 29-09-1992 |
| EP 0940958 | A | 08-09-1999 | EP | 0940958 A1 | 08-09-1999 |
| | | | CN | 1238622 A | 15-12-1999 |
| | | | JP | 2000059253 A | 25-02-2000 |
| | | | US | 6075410 A | 13-06-2000 |
| US 4328587 | A | 04-05-1982 | JP | 1219862 C | 26-07-1984 |
| | | | JP | 55110458 A | 25-08-1980 |
| | | | JP | 58051464 B | 16-11-1983 |
| | | | JP | 1210626 C | 12-06-1984 |
| | | | JP | 55110459 A | 25-08-1980 |
| | | | JP | 58046104 B | 14-10-1983 |
| | | | DE | 3003757 A1 | 28-08-1980 |
| | | | GB | 2045581 A , B | 29-10-1980 |

This Page Blank (uspto)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 January 2002 (03.01.2002)


PCT

(10) International Publication Number
WO 02/01825 A1

- (51) International Patent Classification⁷: **H04L 27/233**
- (21) International Application Number: **PCT/EP01/07188**
- (22) International Filing Date: **25 June 2001 (25.06.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
00/08268 27 June 2000 (27.06.2000) **FR**
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];**
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LEGRAND, Delphine [FR/NL];** Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **BRAJAL, Americo [PT/NL];** Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **CHOULY, Antoine [FR/NL];** Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **DE LA FOUCHARDIERE, Marie-Noëlle;** Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): **CN, JP, US.**
- (84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DETECTION AND CORRECTION OF PHASE JUMPS IN A PHASE SEQUENCE**

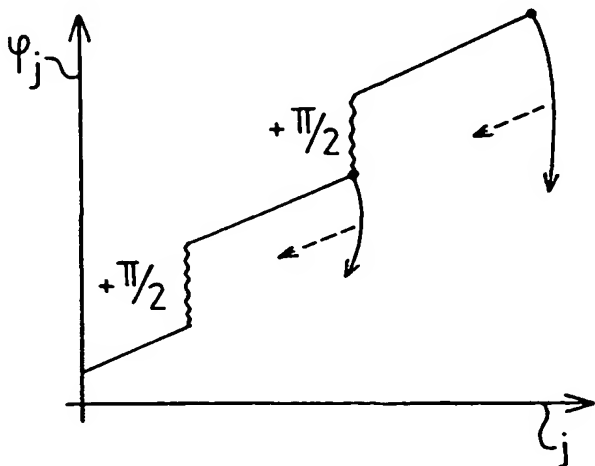

(57) Abstract: The invention relates to any receiver for MPSK ($M=2^n$) modulation, in which an error correction device is used for correcting Tretter type frequency errors and, upstream of this device, a phase estimation device based on decisions made on the received symbols. When the frequency error is such that, based on a certain symbol, an error is made in the decision, this error is translated by a phase jump of $\pm\pi/2^{n-1}$ in the sequence of phase estimations obtained. The frequency estimation obtained is then inaccurate. A receiver according to the invention comprises means for calculating a phase sequence, called initial sequence, based on decisions made on symbols, and means for detecting and correcting phase jumps in this initial sequence, so as to supply a phase sequence, called final sequence, to said frequency error estimation means. Applications: Interactive data transmission system - network head-ends.

WO 02/01825 A1

This Page Blank (uspto)

4/pvt 1

Detection and correction of phase jumps in a phase sequence

Field of the invention

The invention relates to a communication system comprising at least a transmitter and a receiver intended to receive symbols coming from a PSK modulation, and comprising estimation means for estimating a frequency error relating to a symbol based on a sequence of symbol phases. The invention also relates to a receiver intended to be used in
5 such a communication system.

The invention also relates to a method of estimating a frequency error relating to a received symbol, coming from a PSK modulation, based on a sequence of symbol phases, and to a method of detecting and correcting phase jumps in an initial phase sequence of symbols coming from a PSK modulation.

10 The invention finally relates to computer programs comprising instructions for implementing such methods.

Background of the invention

Such an estimation algorithm of a frequency error relating to a received
15 symbol based on a phase sequence is described, for example, in paragraph 4.1 (page 107) of the article <<Feedforward Frequency Estimation for PSK : a Tutorial Review>> by M. Morelli and U. Mengali, published in the journal <<European Transactions on Telecommunications, vol. 9, no. 2, March – April 1998>>. This algorithm is known by the name of Tretter algorithm, or least squares method.

20 To obtain such a phase sequence, it is known that a phase estimation algorithm is used, which estimates the phase relating to a received symbol on the basis of decisions made on various received symbols. For example, the expectation maximization algorithm is used, which is described in paragraph 3.3 of the conference report of the <<International Conference on Communications, New Orleans, USA, 1-5 May, 1994, vol. 2, pp. 940 and
25 945>>, entitled <<Comparison between digital recovery techniques in the presence of frequency shift>> by F. Daffara and J. Lamour.

The problem posed is the following: in a PSK modulation comprising 2^n points, two adjacent points have a phase difference of $\frac{\pi}{2^{n-1}}$. When the frequency error is such that, based on a certain symbol, an error is made in the decision, this error is translated by a phase jump of $\pm \frac{\pi}{2^{n-1}}$ in the sequence of phase estimates obtained. The number of phase jumps that may be obtained depends on the number of symbols contained in the packet and the initial frequency difference.

When the sequence of phases, which are used for applying the Tretter algorithm, includes one or various phase jumps, the frequency estimate obtained is inaccurate. The invention notably has for its object to provide a solution to this problem.

Summary of the invention

For this purpose, a communication system according to the invention and as described in the opening paragraph is characterized in that said receiver comprises calculation means for calculating a phase sequence, called initial sequence, based on decisions made on symbols, and means for detecting and correcting phase jumps in this initial sequence, to supply a phase sequence, called final sequence, to said frequency error estimation means.

Advantageously, said means for detecting and correcting phase jumps comprise:

- modifying means for modifying said initial sequence, so as to produce a plurality of modified sequences which each compensate for a phase jump configuration,
- calculation means for calculating straight line equations which determine the initial sequence and the modified sequences,
- calculation means for calculating for the initial sequence and the modified sequences a mean difference between the initial or modified phases and the phases produced by the corresponding straight line equation, said final sequence being formed by the sequence whose mean difference is minimal.

Brief description of the drawings

These and other aspects of the invention are apparent from and will be elucidated, by way of non-limitative example, with reference to the embodiment(s) described hereinafter.

In the drawings:

- Fig. 1 is a diagram of an example of a communication system according to the invention,

5 - Fig. 2 is a flow chart describing the steps of a phase estimation method,

- Fig. 3 is a flow chart diagram describing the operations used by the phase jump correction and detection means according to the invention,

- Fig. 4 is a representation of a phase sequence including a phase jump,

- Fig. 5 is a representation of a phase sequence including two phase jumps,

10 - Fig. 6 is a representation in the form of curves of the results obtained with the invention.

Description of preferred embodiments

In Fig. 1 is represented an example of a communication system according to the invention. This communication system comprises interactive user terminals 1, which are transmitters within the meaning of the invention, and a head-end station 2, which is a receiver within the meaning of the invention. The head-end station 2 transmits signals in a first frequency band Ku (12-14 GHz). These signals are relayed to interactive user terminals 1 by a satellite 3. The interactive user terminals transmit signals in a second frequency band Ka (20-30 GHz). These signals are relayed to the head-end station 2 by the satellite 3.

20 Each terminal 1 comprises a data source 10 and channel coding means 12. The channel coding means deliver packets of N symbols which contain preamble symbols and data symbols. These packets are then transmitted to filter means 13 and, finally, to modulation means 14, which use a local oscillator that has a frequency f_c .

25 The head-end station 2 comprises demodulation means 20 which use a local oscillator that has a frequency $f_c + \Delta f_0 / T_s$ (where Δf_0 is a normalized frequency difference relative to the symbol frequency, and T_s is the duration of the symbols), and an initial phase Θ_0 . The head-end station 2 also comprises filter means 21 and sampling means 22, which sample the output signal of the filter 21, to deliver symbols called received symbols. The received symbols are transmitted to frequency recovery means 23 which estimate the normalized frequency difference Δf_0 and correct the received symbols to compensate for the estimated difference $\hat{\Delta f}_0$. The frequency recovery means 23 deliver frequency-corrected symbols. These frequency-corrected symbols are transmitted to phase recovery means 24.

The phase-corrected and frequency-corrected symbols are finally transmitted to channel decoding means 25 which deliver data 27.

In the example described here, the phase recovery means 24 comprise phase and frequency estimation means 50 and phase correction means 51. The phase estimation means 50 are described with reference to Fig. 2. They are formed by a loop intended to be passed through L times. In the following of the description the index m (m=1 to L) is a loop counter. Each value of m thus corresponds to one loop path. The loop comprises:

- conventional phase estimation means 52 (for example, expectation maximization) for producing an initial phase sequence S1 relating to a symbol packet $r_k^{(m-1)}$ (m=1 to L, and k=1 to q, where $q \leq N$),
- means 53 for calculating a frequency error relating to said packet, based on the initial sequence S1,
- means 54 for correcting the frequency of the symbols of the packet, to correct said frequency error,
- loop means 55 which supply the frequency-corrected symbols $r_k^{(m)}$ to phase estimation means 52 for a following path through the loop,
- and loop output means 56 which supply to the phase correction means 51 the phases estimated by the phase estimation means 52 (or, directly, the correction to be made), and the symbols to be corrected.

The calculation means 53 calculate a frequency error estimate $\hat{\Delta f}_m$ relating to the symbols $r_k^{(m-1)}$ of a same packet, based on the initial phase sequence S1 produced by the phase estimation means 52. The values of this phase sequence S1 are between $-\infty$ and $+\infty$.

The calculation means 53 comprise:

- means 60 for detecting and correcting phase jumps to correct this initial sequence S1 and to deliver a final sequence S2,
- means 62 for calculating the slope of a straight line which is closest possible to the values of the sequence S2, by applying the Tretter algorithm. The slope obtained forms a frequency error estimate $\hat{\Delta f}_m$ relating to the symbols of the packet. It is this frequency error that is transmitted to the frequency correction means 54. The symbols obtained after frequency correction, $r_k^{(m)} = r_k^{(m-1)} \cdot e^{-2\pi j k \hat{\Delta f}_m}$, are transmitted to the phase estimation means 52 for a new path through the loop. During the last path through the loop (m=L), the symbols $r_k^{(L-1)}$

to be corrected and the phase correction $e^{-j\hat{\theta}_k^{(L)}}$ to be made to these symbols are transmitted to the phase correction means 51.

The means 60 for detecting and correcting phase jumps are represented in Fig.

3. They comprise:

- 5 - means 100 for modifying the initial sequence to compensate for a plurality of phase jump configurations; the correction means 100 produce a plurality of modified sequences which correspond each to the correction of a phase jump configuration;
- means 110 for calculating straight line equations which determine the initial sequence and the modified sequences,
- 10 - calculation means 120 for calculating for the initial sequence and the modified sequences a mean difference between the initial or modified phases and the phases produced by the corresponding straight line equation, said final sequence being formed by the sequence whose mean difference is minimal.

The use of the means 60 for detecting and correcting phase jumps is different
15 and depends on the number of phase jumps one wishes to correct. But the method applied remains the same. The invention can thus be applied to any number of phase jumps. Now two examples of embodiment will be described of the means 60 for detecting and correcting phase jumps:

- a first example, in which the means 60 for detecting and correcting phase jumps are
20 intended to correct a single phase jump of $\pm \frac{\pi}{2}$;
- a second example, in which the means 60 for detecting and correcting phase jumps are intended to correct two phase jumps of $\pm \frac{\pi}{2}$ in the same direction; this second example corresponds to the most probable case where the transmitted packets are ATM cells of 53 octets.

25 In the examples that will be described, the modification means 100 modify the initial sequence S1 phase by phase. But, for diminishing the number of calculations to be performed, it is possible to modify the sequence phase-group by phase-group. This is equivalent to compensating only for certain configurations of phase jumps.

The first example of embodiment of the means 60 for detecting and correcting
30 phase jumps is described with reference to Fig. 4. In Fig. 4 is represented an example of an initial sequence S1 comprising a phase jump of $+\frac{\pi}{2}$. The means 60 for detecting and correcting phase jumps have for their function to detect the position and the direction of the

phase jump and then correct it. Therefore, as indicated in Fig. 3, they perform the following operations:

a) The Tretter algorithm is applied to the initial sequence S1 formed by phases φ_j ($j=0$ to $q-1$) to obtain the straight line equation D_0 which determines this sequence. This equation is written as:

$D_0: y=a_0.x+b_0$ with:

$$a_0 = \alpha.S' - \beta.S \text{ and } b_0 = \gamma.S - \beta.S'$$

where $S = \sum_{j=0}^{q-1} \varphi_j$, $S' = \sum_{j=0}^{q-1} j.\varphi_j$, $\alpha = 12/(q.(q^2 - 1))$, $\beta = 6/(q.(q+1))$ and

$$\gamma = 2(2q-1)/(q(q+1))$$

10 These expressions can easily be derived from the calculations shown on pages 523 and 524 of the title <<Numerical Recipes in C, the art of scientific computing, second edition>> by W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, published by Cambridge University Press in 1995, while considering that the uncertainty of the phases is constant whatever j .

15 b) An initial mean difference $(\sigma_0)^2$ is calculated between the phases φ_j of the initial sequence S1 and the phases $y(j)$ coming from the straight line equation D_0 .

$$(\sigma_0)^2 = \frac{1}{q} \sum_{j=0}^{q-1} \left| \varphi_j - (a_0.j + b_0) \right|^2$$

c) The initial sequence S1 is run through point by point by starting from the end (symbol of rank $q-1$); the index i is a counter that indicates the position of the phase jump ($i=q-1, \dots, 0$).

20 d) With each step the phases φ_j ($j=q-i, \dots, q-1$) are modified by $+\frac{\pi}{2}$, so that a modified sequence C_i^+ is obtained. This sequence C_i^+ is thus constituted by phases

$$\varphi_j^+ = \begin{cases} \varphi_j & \text{pour } j=0, \dots, q-i-1 \\ \varphi_j + \frac{\pi}{2} & \text{pour } j=q-i, \dots, q-1 \end{cases}$$

e) With each step one straight line equation D_i^+ is calculated, which straight lines determine the modified sequence C_i^+ . This equation is written as:

25 $D_i^+ : y=(a_i)^+.x + (b_i)^+$ with :

$$a_i^+ = \alpha.(S_i')^+ - \beta.(S_i)^+ \text{ and } b_i^+ = \gamma.(S_i)^+ - \beta.(S_i')^+$$

$$\text{where } (S_i)^+ = \sum_{j=0}^{q-1} \varphi_j^+ = S + i \cdot \frac{\pi}{2} \text{ and } (S_i')^+ = \sum_{j=0}^{q-1} j \varphi_j^+ = S' + \frac{\pi}{2} j(q - \frac{i+1}{2})$$

that is to say,

$$a_i^+ = a_0 + \alpha \cdot \frac{\pi}{2} i(q - \frac{i+1}{2}) - \beta i \cdot \frac{\pi}{2} = a_0 + (A_i^+) \text{ with } (A_i^+) = \alpha \cdot \frac{\pi}{2} i(q - \frac{i+1}{2}) - \beta i \cdot \frac{\pi}{2}$$

$$5 \text{ and } b_i^+ = b_0 + \gamma i \cdot \frac{\pi}{2} - \beta \cdot \frac{\pi}{2} i(q - \frac{i+1}{2}) = b_0 + (B_i^+) \text{ with } (B_i^+) = \gamma i \cdot \frac{\pi}{2} - \beta \cdot \frac{\pi}{2} i(q - \frac{i+1}{2})$$

f) For each modified sequence C_i^+ is calculated a mean difference $(\sigma_i^+)^2$ between the phases φ_j^+ of the modified sequence C_i^+ and the phases $y(j)$ coming from the straight line equation D_i^+ .

$$(\sigma_i^+)^2 = \frac{1}{q} \sum_{j=0}^{q-1} \left| \varphi_j^+ - [(a_i)^+ \cdot j + (b_i)^+] \right|^2$$

10 g) The operations c) to f) are repeated while the phases φ_j ($j = q-i, \dots, q-1$) of the initial sequence of $-\frac{\pi}{2}$ are modified. For each value of i , another modified sequence C_i^- is

$$\text{obtained. It is formed by the phases } \varphi_j^- = \begin{cases} \varphi_j & \text{for } j = 0, \dots, q-i-1 \\ \varphi_j - \frac{\pi}{2} & \text{for } j = q-i, \dots, q-1 \end{cases}$$

h) The final sequence S2 is formed by the sequence whose mean difference is minimal.

15 For a less complex use, the mean differences $(\sigma_i^+)^2$ are calculated based on the initial mean difference $(\sigma_0)^2$. One obtains:

$$\begin{aligned} (\sigma_i^+)^2 &= \sigma_0^2 + 2\pi \sum_{j=q-i}^{q-1} \varphi_j - 2 \cdot (B_i^+) S - 2(A_i^+) S' \\ &+ b_0 [(A_i^+) \cdot q \cdot (q-1) + 2 \cdot (B_i^+) \cdot q - \pi i] \\ &+ a_0 \left[\frac{(A_i^+) \cdot q \cdot (q-1) \cdot (2q-1)}{3} + (B_i^+) \cdot q \cdot (q-1) - \frac{\pi}{2} i \cdot (2q-i-1) \right] \\ &+ q \cdot (B_i^+)^2 + (A_i^+) \cdot (B_i^+) \cdot q \cdot (q-1) + \frac{(A_i^+)^2 \cdot q \cdot (q-1) \cdot (2q-1)}{6} - \frac{\pi}{2} \cdot (A_i^+) i \cdot (2q-i-1) - \pi \cdot (B_i^+) i + \frac{\pi^2}{4} i \end{aligned}$$

The mean difference $(\sigma_i^-)^2$ is obtained by replacing in the expression of $(\sigma_i^+)^2$:

π by $-\pi$, (A_i^+) by $-(A_i^-)$ and (B_i^+) by $-(B_i^-)$.

The second example of embodiment of the means 60 for detecting and correcting phase jumps is described with reference to Fig. 5. In Fig. 5 is shown an example of an initial sequence S1 comprising two phase jumps of $+\frac{\pi}{2}$. At step d) the phases are modified by $+\frac{\pi}{2}$ for the p symbols from rank q-k-p to q-k-1, and by $+\pi$ for the k symbols

5 from rank q-k to q (k varies between 1 and q and p varies between 1 and q-k).

The modified sequences obtained at step d) are thus written as:

$$\varphi_j^+ = \begin{cases} \varphi_j & \text{for } j = 0, \dots, q-k-p-1 \\ \varphi_j + \frac{\pi}{2} & \text{for } j = q-k-p, \dots, q-k-1 \\ \varphi_j + \pi & \text{for } j = q-k, \dots, q \end{cases}$$

$$\varphi_j^- = \begin{cases} \varphi_j & \text{for } j = 0, \dots, q-k-p-1 \\ \varphi_j - \frac{\pi}{2} & \text{for } j = q-k-p, \dots, q-k-1 \\ \varphi_j - \pi & \text{for } j = q-k, \dots, q \end{cases}$$

And the straight line equations calculated in step e) are written as:

10 $D_{p,k}^+ : y = (a_{p,k}^+) \cdot x + (b_{p,k}^+)$ with :

$$(a_{p,k}^+)^+ = \alpha \cdot (S_{p,k}^-)^+ - \beta \cdot (S_{p,k}^+)^+ \text{ and } (b_{p,k}^+)^+ = \gamma \cdot (S_{p,k}^+)^+ - \beta \cdot (S_{p,k}^-)^+$$

$$\text{where } (S_{p,k}^+)^+ = \sum_{j=0}^{q-1} \varphi_j^+ = S + p \cdot \frac{\pi}{2} + k \cdot \pi \text{ and}$$

$$(S_{p,k}^-)^+ = \sum_{j=0}^{q-1} j \varphi_j^+ = S' + \frac{\pi}{2} \cdot p \cdot (q-k-\frac{p+1}{2}) + \pi \cdot k \cdot (q-\frac{k+1}{2})$$

that is to say,

$$a_{p,k}^+ = a_0 + \alpha \left[\frac{\pi}{2} \cdot p \cdot (q-k-\frac{p+1}{2}) + \pi \cdot k \cdot (q-\frac{k+1}{2}) \right] - \beta \left[p \frac{\pi}{2} + k \pi \right] = a_0 + (A_{p,k}^+)$$

15 with $(A_{p,k}^+)^+ = \alpha \left[\frac{\pi}{2} \cdot p \cdot (q-k-\frac{p+1}{2}) + \pi \cdot k \cdot (q-\frac{k+1}{2}) \right] - \beta \left[p \frac{\pi}{2} + k \pi \right]$

$$\text{and } b_{p,k}^+ = b_0 + \gamma \left[p \frac{\pi}{2} + k \pi \right] - \beta \left[\frac{\pi}{2} \cdot p \cdot (q-k-\frac{p+1}{2}) + \pi \cdot k \cdot (q-\frac{k+1}{2}) \right] = b_0 + (B_{p,k}^+)$$

$$\text{with } (B_{p,k}^+)^+ = \gamma \left[p \frac{\pi}{2} + k \pi \right] - \beta \left[\frac{\pi}{2} \cdot p \cdot (q-k-\frac{p+1}{2}) + \pi \cdot k \cdot (q-\frac{k+1}{2}) \right]$$

For a less complex implementation, the mean differences $(\sigma_{p,k}^+)^2$ are calculated

based on the initial mean difference $(\sigma_0)^2$. The following expression is obtained:

$$\begin{aligned}
(\sigma_{p,k}^+)^2 = & \sigma_0^2 + 2\pi \sum_{j=q-k}^{q-1} \varphi_j + \pi \sum_{j=q-k-p}^{q-k-1} \varphi_j - 2.(B_{p,k}^+)S - 2(A_{p,k}^+)S' \\
& + b_0 [(A_{p,k}^+).q.(q-1) + 2.(B_{p,k}^+).q - \pi(p+2k)] \\
& + a_0 \left[\frac{(A_{p,k}^+).q.(q-1).(2q-1)}{3} + (B_{p,k}^+).q.(q-1) - \frac{\pi}{2}.p.(2q-2k-p-1) - \pi k.(2q-k-1) \right] \\
& + q.(B_{p,k}^+)^2 + (A_{p,k}^+).(B_{p,k}^+).q.(q-1) + \frac{(A_{p,k}^+)^2.q.(q-1).(2q-1)}{6} \\
& - \frac{\pi}{2}.(A_{p,k}^+).p.(2q-2k-p-1) - \pi.(A_{p,k}^+).k.(2q-k-1) - \pi.(B_{p,k}^+).(p+2k) + \frac{\pi^2}{4}.(p+4k)
\end{aligned}$$

The mean difference $(\sigma_{p,k}^-)^2$ is derived from the expression $(\sigma_{p,k}^+)^2$ by replacing

π by $-\pi$, $(A_{p,k}^+)$ by $-(A_{p,k}^-)$ and $(B_{p,k}^+)$ by $-(B_{p,k}^-)$.

It is evident that the means that have just been described are calculation means advantageously used in the form of a computer program intended to be executed by a microprocessor placed in the receiver.

In Fig. 6 are shown the results obtained thanks to the invention in a system as described with reference to Figs. 1 and 2. The curves of Fig. 6 represent the packet error rate (PER) plotted against the signal-to-noise ratio (SNR) in the following three cases:

- curve R3: when the phase jumps are not detected;
- curve R2: when the phase jumps are detected and corrected with the method according to the invention;
- curve R1: for a Gaussian channel (no imperfection as regards either phase or frequency).

These curves have been obtained via:

- a QPSK modulation,
- a random initial frequency error Δf_0 comprised between -1% and $+1\%$ of the symbol frequency,
- a random initial phase error θ_0 comprised between $-\pi$ et $+\pi$,
- packets which comprise a known preamble of 48 symbols $[a_1, \dots, a_{48}]$ and a payload part $[a_{49}, \dots, a_{592}]$ of 544 symbols,
- a frequency recovery algorithm (utilized by the means 23), which uses the packet preambles, and which is applied before the phase estimation, so that the residual frequency error Δf_1 before the phase estimation is lower than or equal to 0.3% of the symbol frequency,
- phase estimation means 50 which are formed by a loop which is passed through $L=2$ times,
- on transmission, a Reed Solomon coding and a convolution coding which is punctured in 64 states.

The invention is not restricted to the embodiments that have just been described by way of example. More particularly, it relates to any type of receiver that utilizes a frequency error correction device of the Tretter type and, upstream of this device, a phase estimation device based on decisions made on the received symbols.

5 Moreover, the number of phase jumps that may be detected and corrected by applying this method is arbitrary. When the transmitted data packets are longer, it is possible to have more than two phase jumps. In that case, in order not to complicate the calculations too much, one advantageously chooses to divide the data packets into smaller portions so as to be in the same position again where one has a maximum of two phase jumps per packet
10 portion. The method described above is thus applied to each portion of the packet. It provides the position and the direction of the various phase jumps. The phases are then corrected by a multiple of $\frac{\pi}{2}$ as a function of the direction of the jumps and their number. Then, the Tretter algorithm is applied to this corrected sequence to obtain the final frequency estimate. In order to avoid a jump occurring between two portions of a packet, it is desirable to provide an
15 overlap between the various portions of the same packet.

 The method proposed is generally used for any MPSK modulation by considering phase jumps of $\pm 2\pi / M$ (instead of $\pm \pi / 2$ for a QPSK modulation).

CLAIMS:

1. A communication system comprising at least a transmitter (1) and a receiver (2) intended to receive symbols coming from a PSK modulation, and comprising estimation means (62) for estimating a frequency error relating to a symbol based on a sequence of symbol phases,
 5 characterized in that said receiver comprises calculation means (52) for calculating a phase sequence, called initial sequence (S1), based on decisions made on symbols, and means for detecting and correcting phase jumps in this initial sequence, to supply a phase sequence, called final sequence (S2), to said frequency error estimation means (62).
- 10 2. A communication system as claimed in claim 1, characterized in that said means for detecting and correcting phase jumps comprise:
 - modifying means (100) for modifying said initial sequence (S1) so as to produce a plurality of modified sequences (C_i^+ ; C_i^- ; $C_{p,k}^+$; $C_{p,k}^-$), which each compensate for a phase jump configuration,
 - 15 - calculation means (110) for calculating straight line equations which determine the initial sequence (D_0) and the modified sequences (D_i^+ ; D_i^- ; $D_{p,k}^+$; $D_{p,k}^-$),
 - calculation means (120) for calculating for the initial sequence and the modified sequences a mean difference between the initial or modified phases and the phases produced by the corresponding straight line equation (σ_0^2 ; $(\sigma_i^+)^2$; $(\sigma_i^-)^2$; $(\sigma_{p,k}^+)^2$; $(\sigma_{p,k}^-)^2$), said final
 - 20 sequence being formed by the sequence whose mean difference is minimal.
3. A communication system as claimed claim 2, characterized in that said initial sequence is modified phase-group by phase-group.
- 25 4. A receiver intended to be used in a communication system as claimed in one of the claims 1 or 2.

5. A receiver as claimed in claim 4, characterized in that said initial sequence is modified phase-group by phase-group.

6. A method of estimating a frequency error relating to a received symbol coming from a PSK modulation, based on a sequence of symbol phases, characterized in that the method comprises a calculation step of calculating a phase sequence, called initial sequence, based on decisions made on symbols, and a step of detecting and correcting phase jumps in this initial sequence, to produce a phase sequence, called final sequence, used for the estimation of a frequency error.

10

7. A method of detecting and correcting phase jumps in an initial sequence of symbol phases coming from a PSK modulation, characterized in that it comprises:

- a step (c, d) of modifying said initial sequence (S1) so as to produce a plurality of modified sequences which each compensate for a phase jump configuration,
- 15 - a step of calculating straight line equations which determine the initial sequence (a) and the modified sequences (e),
- a calculation step of calculating for the initial sequence (a) and the modified sequences (f) a mean difference between the initial or modified phases and the phases produced by the corresponding straight line equation, said final sequence being formed by the sequence
- 20 whose mean difference is minimal.

8. A method of detecting and correcting phase jumps as claimed in claim 7, characterized in that said initial sequence is modified phase-group by phase-group.

25 9. A program comprising instructions for implementing the steps of a method of detecting and correcting phase jumps as claimed in claim 7 when said program is executed by a processor.

10. A program comprising instructions for implementing the steps of a method of estimating a frequency error relating to a received symbol, as claimed in claim 6, when said program is executed by a processor.

30

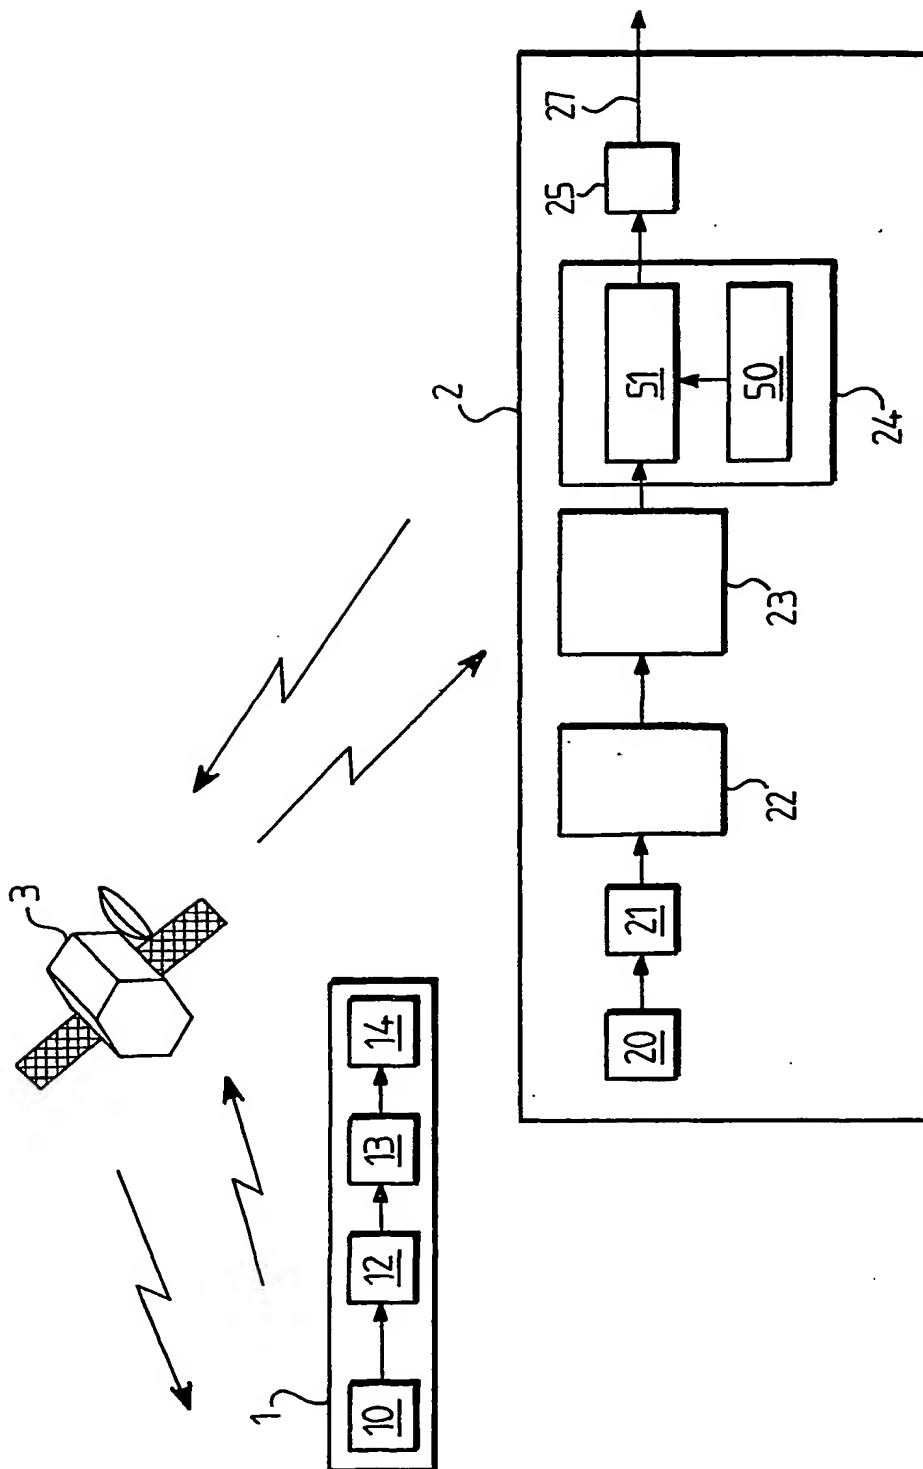


FIG.1

This Page Blank (uspto)

2/4

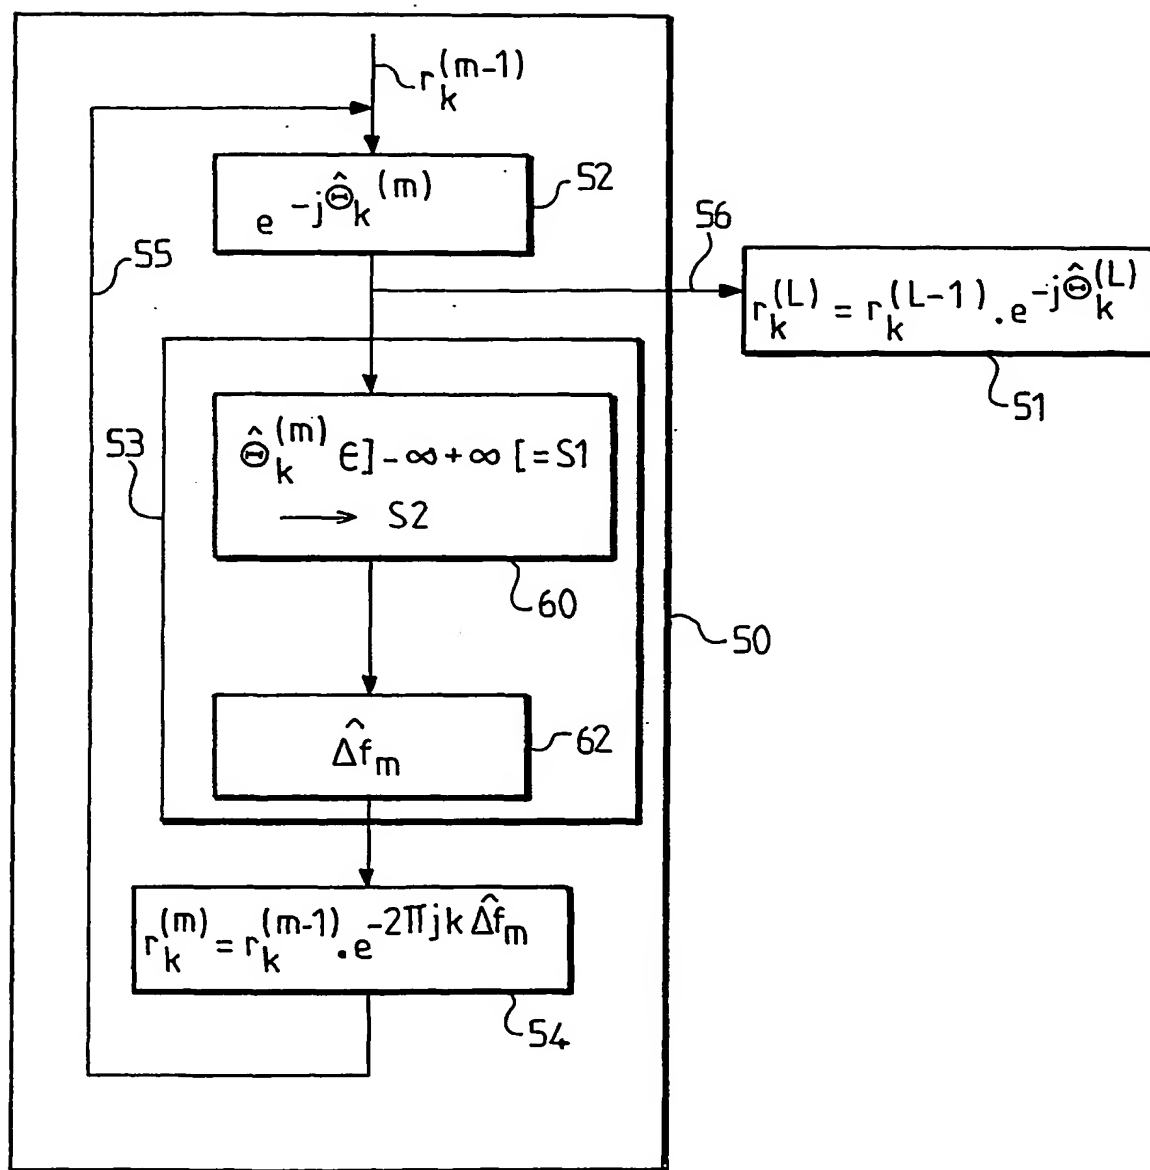


FIG. 2

JC13 Rec'd PCT/PTO 26 FEB 2002

This Page Blank (uspto)

3/4

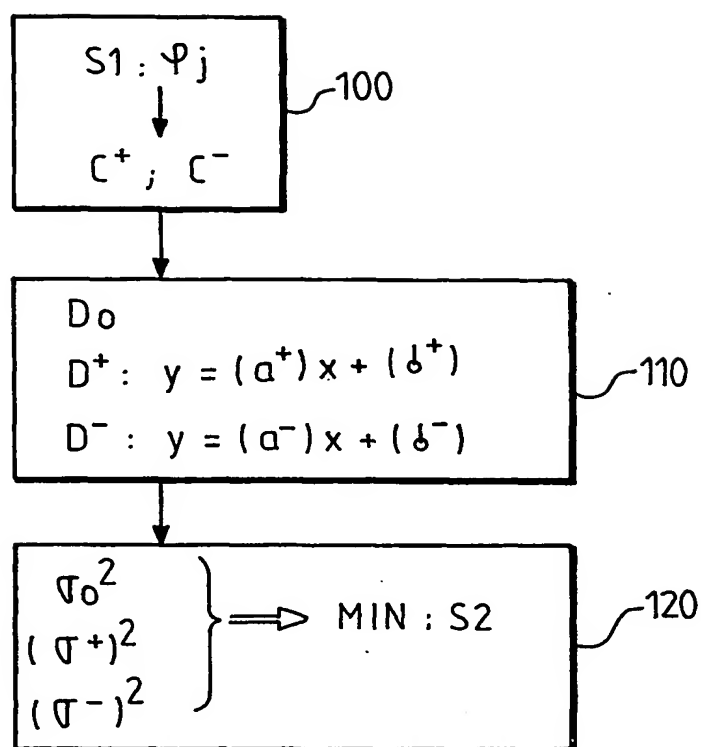


FIG. 3

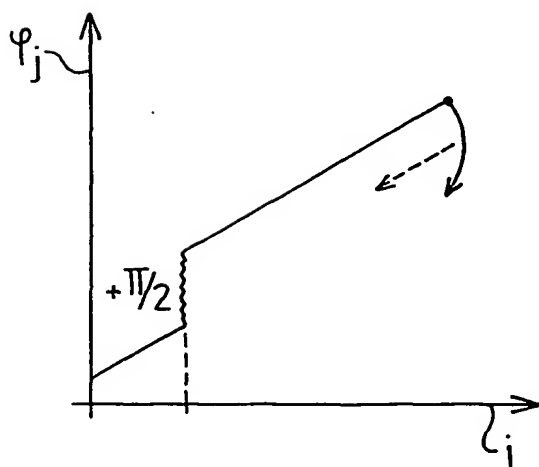


FIG. 4


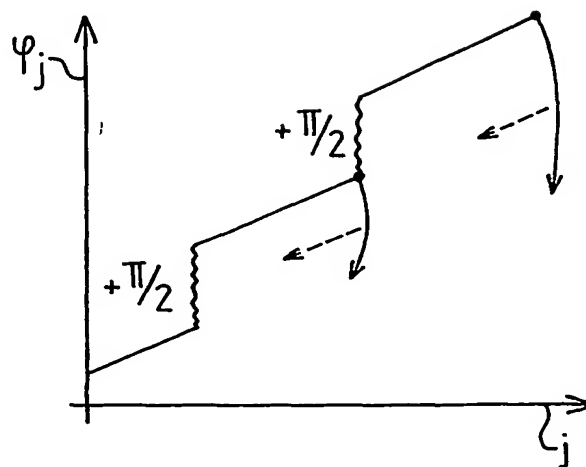


FIG. 5

This Page Blank (uspto)

4/4

FIG. 6

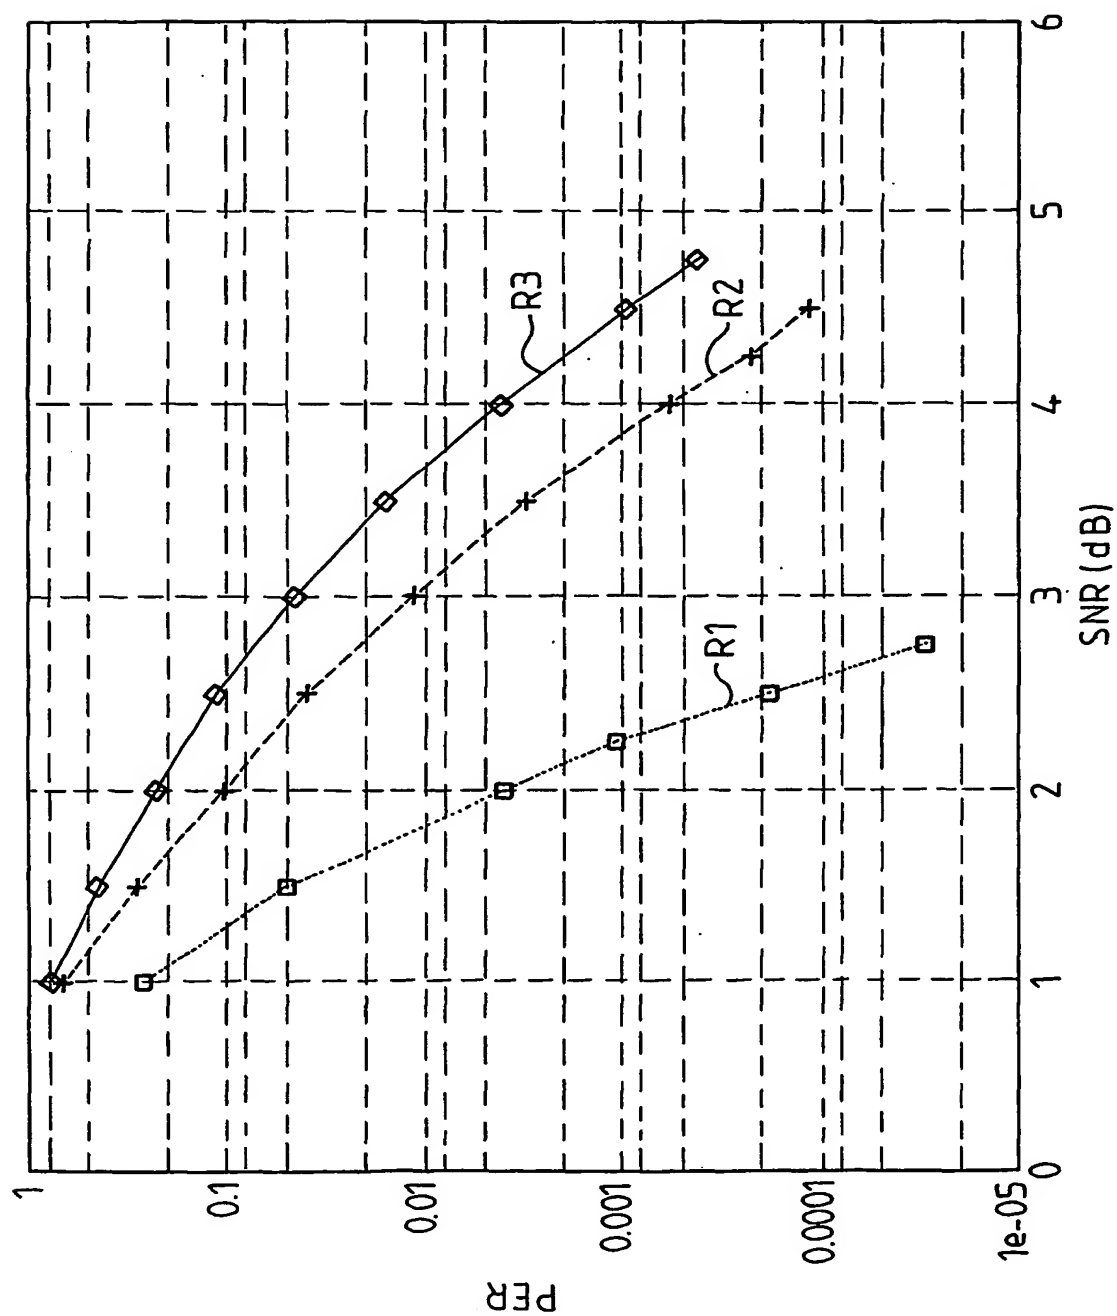

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

Intern: 31 Application No
PCT/EP 01/07188

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L27/233

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---------------------------------------------------------------------------------------------------------------|-----------------------|
| X | EP 0 648 037 A (THOMSON CSF) 12 April 1995 (1995-04-12) page 2, line 52 -page 3, line 8 | 1-10 |
| X | EP 0 349 064 A (TRT; PHILIPS) 3 January 1990 (1990-01-03) page 7, line 38 -page 8, line 17 claim 3 | 1,4-6,10 |
| A | | 2,3,7-9 |
| X | EP 0 940 958 A (SONY INT EUROP GMBH) 8 September 1999 (1999-09-08) page 7, line 30 - line 35 claim 1 | 1,4-6,10 |
| A | | 2,3,7-9 |
| | -/- | |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

12 October 2001

Date of mailing of the international search report

22/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax (+31-70) 340-3016

Authorized officer

Orozco Roura, C

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/EP 01/07188

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|-----------------------------------------------------------------------------------------------------|-----------------------|
| A | <p>US 4 328 587 A (MIZUNO TOSHIO ET AL) 4 May 1982 (1982-05-04) abstract</p> <p>-----</p> | 1-10 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern 1 Application No

PCT/EP 01/07188

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|-------------------------------------------|---|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| EP 0648037 | A | 12-04-1995 | FR 2711028 A1 DE 69428174 D1 EP 0648037 A1 | 14-04-1995 11-10-2001 12-04-1995 |
| EP 0349064 | A | 03-01-1990 | FR 2633471 A1 CA 1308450 A1 DE 68916115 D1 DE 68916115 T2 EP 0349064 A1 JP 2046044 A JP 3031922 B2 US 5151925 A | 29-12-1989 06-10-1992 21-07-1994 02-02-1995 03-01-1990 15-02-1990 10-04-2000 29-09-1992 |
| EP 0940958 | A | 08-09-1999 | EP 0940958 A1 CN 1238622 A JP 2000059253 A US 6075410 A | 08-09-1999 15-12-1999 25-02-2000 13-06-2000 |
| US 4328587 | A | 04-05-1982 | JP 1219862 C JP 55110458 A JP 58051464 B JP 1210626 C JP 55110459 A JP 58046104 B DE 3003757 A1 GB 2045581 A , B | 26-07-1984 25-08-1980 16-11-1983 12-06-1984 25-08-1980 14-10-1983 28-08-1980 29-10-1980 |

This Page Blank (uspto)